


PRODUCT SUBMITTAL

Veneer Anchor Ties (Dovetail Optional)



Triangle (Tri-Tie)

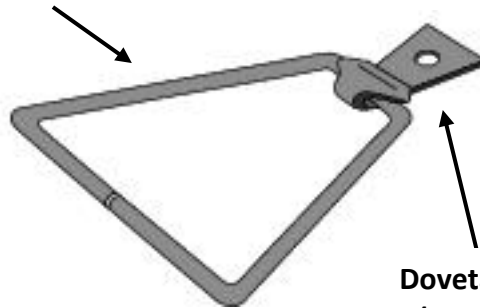

Dovetail Clip
(optional)

Applications:

Mechanically Anchored
to Concrete

OR...

Inserted into Dovetail
Anchor Slot

MATERIAL CONFORMANCE	SIZES & FINISHES
<p>SHEET METAL – (Carbon Steel) ASTM A1008/A1008M</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel (WIRE) ASTM A580 / ASTM A580M</p> <p>Stainless Steel (SHEET METAL) ASTM A167 Type 304</p> <p>ASTM A82 / A82M – (Cold drawn steel wire)</p> <p>Tensile Strength – 80,000 psi</p> <p>Yield Point – 70,000 psi</p> <p>ACI / ASCE 530 – (Building code requirements for masonry structures)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82% Post-Consumer, 18% Post Industrial / Pre-Consumer</p> <p>Stainless Steel, 60% Post-Consumer, VOC Content: 0%</p>	<p>Triangle Wire Diameter:</p> <p><input type="checkbox"/> 3/16" dia. <input type="checkbox"/> 1/4" dia.</p> <p>Dovetail Clip:</p> <p>12 GA x 1" with 5/16" hole</p> <p><input type="checkbox"/> YES, ADD DOVETAIL CLIP</p> <p><input type="checkbox"/> NO, DON'T ADD DOVETAIL CLIP</p> <p>Dovetail Anchor Slot: <i>(coming FALL 2017)</i></p> <p>Standard Anchor Slot Dimensions: 1" width x 10' length w/ foam-liner</p> <p>Finish:</p> <p><input type="checkbox"/> Mill Galvanized <input type="checkbox"/> Hot Dipped <input type="checkbox"/> Stainless Steel</p> <p>Triangle Size:</p> <p><input type="checkbox"/> 3" <input type="checkbox"/> 3.5" <input type="checkbox"/> 4" <input type="checkbox"/> 4.5" <input type="checkbox"/> 5"</p> <p><input type="checkbox"/> 6" <input type="checkbox"/> 7" <input type="checkbox"/> 8" <input type="checkbox"/> 10" <input type="checkbox"/> 12"</p>

9802 Widmer Rd, Lenexa, KS 66215



www.QSWP.com

P: 913.888.2929 - FAX: 913.888.4405



MADE IN AMERICA