



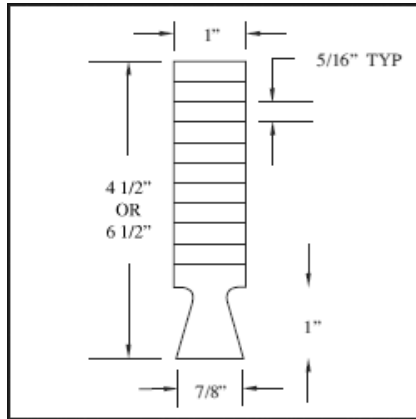

PRODUCT SUBMITTAL

3 1/2 inch Dovetail Anchor

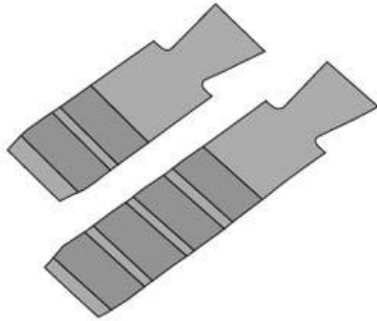

Application:

Inserted into Dovetail Anchor Slot

CONFORMANCE OF MATERIAL	PRODUCT OPTIONS
<p>3.5" Dovetail Anchor – anchors masonry to concrete</p> <p>Standard – 1 inch wide x 16ga. – 3.5" long (other lengths may be available upon request)</p> <p>MATERIAL CONFORMANCE Sheet Metal (Carbon Steel) – ASTM A1008/A1008M Zinc Coating: Mill Galvanized: ASTM A653/A653M Class B</p> <p>Sheet Metal (Stainless Steel) ASTM A 666, ASTM A 480, ASTM A420/ A240M ASTM A167, AISI Type 304 Stainless</p> <p>NOTE: Quality Steel and Wire, LLC is not responsible for incompatibility if ties/slots are interchanged with those of other manufacturers.</p>	<p>Dovetail Anchor Slot: <i>Coming Soon</i></p> <p>Standard Anchor Slot Dimensions: 1" width x 10' length filled with foam</p> <p>16 GA 3.5" Dovetail Anchor Finish: <input type="checkbox"/> Mill Galvanized <input type="checkbox"/> Hot Dipped <input type="checkbox"/> Stainless Steel</p> <p>LENGTH: <input type="checkbox"/> 3" <input type="checkbox"/> 5.5" <input type="checkbox"/> Other _____</p> <p>NOTE: Quality Steel and Wire, LLC recommends Stainless Steel for maximum protection against corrosion.</p>

9802 Widmer Rd, Lenexa, KS 66215

www.QSWMFG.com



P: 913.888.2929 - FAX: 913.888.4405

100% American Labor & Materials