




# PRODUCT SUBMITTAL

## Veneer Anchor Ties (Dovetail Optional)

Triangle (Tri-Tie)

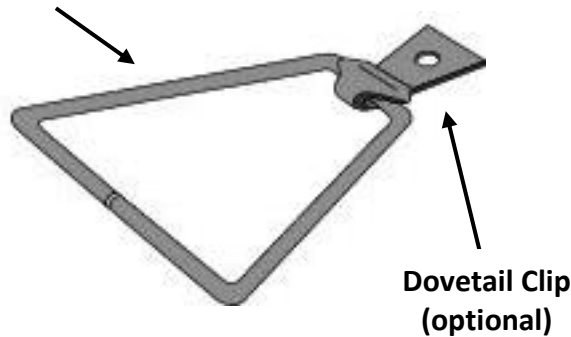

**Applications:**

**Mechanically Anchored to Concrete**

**OR...**

**Inserted into Dovetail Anchor Slot**

CONFORMANCE OF MATERIAL	PRODUCT OPTIONS
<p><b>SHEET METAL – (Carbon Steel) ASTM A1008/A1008M</b></p> <p>Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 oz per sq ft)</b></p> <p>Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel (WIRE) <b>ASTM A580 / ASTM A580M</b></p> <p>Stainless Steel (SHEET METAL) <b>ASTM A167 Type 304</b></p> <p><b>ASTM A82 / A82M – (Cold drawn steel wire)</b></p> <p>Tensile Strength – 80,000 psi</p> <p>Yield Point – 70,000 psi</p> <p><b>ACI / ASCE 530 – (Building code requirements for masonry structures)</b></p> <p><b>Recycled Content:</b> Mill Galvanized &amp; Hot Dipped, 82% Post-Consumer, 18% Post Industrial / Pre-Consumer</p> <p>Stainless Steel, 60% Post-Consumer, VOC Content: 0%</p>	<p><b>Triangle Wire Diameter:</b></p> <p><input type="checkbox"/> 3/16" dia.   <input type="checkbox"/> 1/4" dia.</p> <p><b>Dovetail Clip:</b></p> <p>12 GA x 1" with 5/16" hole</p> <p><input type="checkbox"/> YES, ADD DOVETAIL CLIP</p> <p><input type="checkbox"/> NO, DON'T ADD DOVETAIL CLIP</p> <p><b>Dovetail Anchor Slot:</b></p> <p><i>(coming soon)</i></p> <p><b>Standard Anchor Slot Dimensions:</b></p> <p>1" width x 10' length w/ foam-liner</p> <p><b>Finish:</b></p> <p><input type="checkbox"/> Mill Galvanized   <input type="checkbox"/> Hot Dipped   <input type="checkbox"/> Stainless Steel</p> <p><b>Triangle Size:</b></p> <p><input type="checkbox"/> 3"   <input type="checkbox"/> 3.5"   <input type="checkbox"/> 4"   <input type="checkbox"/> 4.5"   <input type="checkbox"/> 5"</p> <p><input type="checkbox"/> 6"   <input type="checkbox"/> 7"   <input type="checkbox"/> 8"   <input type="checkbox"/> 10"   <input type="checkbox"/> 12"</p>

9802 Widmer Rd, Lenexa, KS 66215

[www.QSWMFG.com](http://www.QSWMFG.com)



P: 913.888.2929 - FAX: 913.888.4405

**100% American Labor & Materials**