
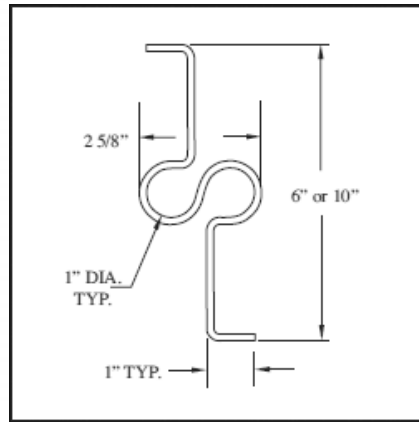


PRODUCT SUBMITTAL

Rebar Positioners (2 sizes)

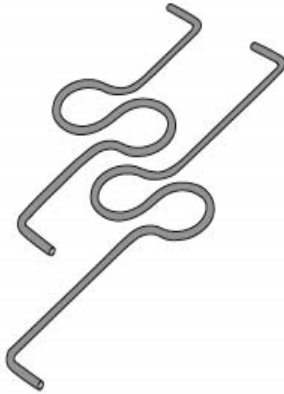

Applications:

Designed for installation in either 8" or 12" block.

Positioners accept up to #8 rebar.

Positions/Controls location of rebar.

Forces rebar to avoid edges of block inside core.

MATERIAL CONFORMANCE	SIZES & FINISHES
<p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel (WIRE) ASTM A580 / ASTM A580M Stainless Steel (SHEET METAL) ASTM A167 Type 304</p> <p>ASTM A82 / A82M – (Cold drawn steel wire) Tensile Strength – 80,000 psi Yield Point – 70,000 psi</p> <p>ACI / ASCE 530 – (Building code requirements for masonry structures)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82% Post-Consumer, 18% Post Industrial / Pre-Consumer Stainless Steel, 60% Post-Consumer, VOC Content: 0%</p>	<p>Product Description:</p> <ul style="list-style-type: none"> <input type="checkbox"/> Controls the position of vertical rebar, avoiding edges of the inside core of block walls. <p>Wire Gauge:</p> <ul style="list-style-type: none"> <input type="checkbox"/> 9 ga. – 3/16" diameter <p>Finish:</p> <ul style="list-style-type: none"> <input type="checkbox"/> A1008 bright basic carbon steel wire <p>Positioner Size:</p> <ul style="list-style-type: none"> <input type="checkbox"/> 8-inch <input type="checkbox"/> 12-inch

9802 Widmer Rd, Lenexa, KS 66215



www.QSWP.com

P: 913.888.2929 - FAX: 913.888.4405



MADE IN AMERICA