




PRODUCT SUBMITTAL

FS Stakes (various sizes)

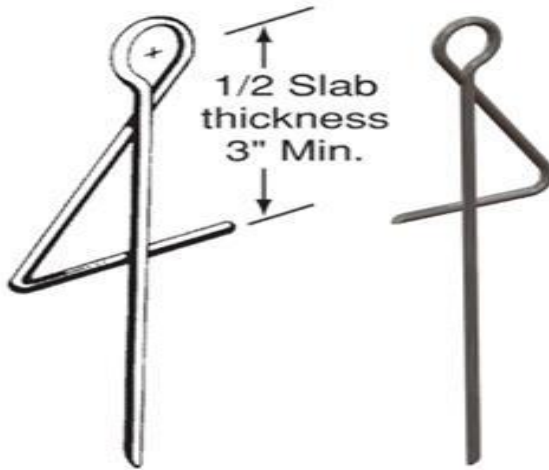

Applications:

FS Stakes are fabricated with 0.218" (#5.5ga) wire for 1/2" – 3/4" bar diameters.

FS Stakes are able to secure/position dowel bars or tie bars in 6"-12" thick slabs.

CONFORMANCE OF MATERIAL	PRODUCT OPTIONS
<p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel (WIRE) ASTM A580 / ASTM A580M Stainless Steel (SHEET METAL) ASTM A167 Type 304</p> <p>ASTM A82 / A82M – (Cold drawn steel wire) Tensile Strength: 80,000 to 90,000 psi Yield Point: 70,000 psi</p> <p>ACI / ASCE 530 – (Building code requirements for masonry structures)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82% Post-Consumer, 18% Post Industrial / Pre-Consumer Stainless Steel, 60% Post-Consumer, VOC Content: 0%</p>	<p>Wire Diameter:</p> <p><input type="checkbox"/> 0.218" bright carbon wire (#5.5 gauge)</p> <p>Finish:</p> <p><input type="checkbox"/> Bright basic A1008 carbon steel</p> <p>FS Stake Size:</p> <p><input type="checkbox"/> 3"x 1/2" <input type="checkbox"/> 3"x 5/8" <input type="checkbox"/> 3"x 3/4"</p> <p><input type="checkbox"/> 3.5"x 1/2" <input type="checkbox"/> 3.5"x 5/8" <input type="checkbox"/> 3.5"x 3/4"</p> <p><input type="checkbox"/> 4"x 1/2" <input type="checkbox"/> 4"x 5/8" <input type="checkbox"/> 4"x 3/4"</p> <p><input type="checkbox"/> 4.5"x 1/2" <input type="checkbox"/> 4.5"x 5/8" <input type="checkbox"/> 4.5"x 3/4"</p> <p><input type="checkbox"/> 5"x 1/2" <input type="checkbox"/> 5"x 5/8" <input type="checkbox"/> 5"x 3/4"</p> <p><input type="checkbox"/> 6"x 1/2" <input type="checkbox"/> 6"x 5/8" <input type="checkbox"/> 6"x 3/4"</p> <p>More sizes may be available upon request.</p>

9802 Widmer Rd, Lenexa, KS 66215

www.QSWMFG.com



P: 913.888.2929 - FAX: 913.888.4405

100% American Labor & Materials