




PRODUCT SUBMITTAL

Rebar Supports (4 types)

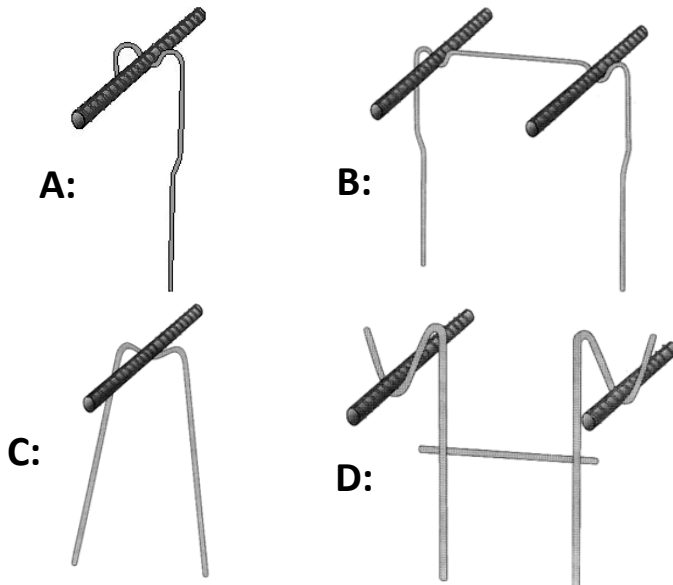

Applications:

Rebar chairs & supports for accurate positioning of various rebar types & sizes to code during concrete placement.

Ideal for slabs, floors, sidewalks, driveways, etc.

CONFORMANCE OF MATERIAL	PRODUCT OPTIONS
<p>SHEET METAL – (Carbon Steel) ASTM A1008/A1008M</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel (WIRE) ASTM A580 / ASTM A580M Stainless Steel (SHEET METAL) ASTM A167 Type 304</p> <p>ASTM A82 / A82M – (Cold drawn steel wire) Tensile Strength: 80,000 – 95,000 psi Yield Point: 70,000 psi</p> <p>ACI / ASCE 530 – (Building code requirements for masonry structures)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82% Post-Consumer, 18% Post Industrial / Pre-Consumer Stainless Steel, 60% Post-Consumer, VOC Content: 0%</p>	<p>Rebar Support Type:</p> <p><input type="checkbox"/> A: Single Rebar Support “1RS1”</p> <p><input type="checkbox"/> B: Double Rebar Support “1RS2”</p> <p><input type="checkbox"/> C: “M” Type Single Rebar Support “1TS1”</p> <p><input type="checkbox"/> D: Heavy Duty Footing Chair “1TS2”</p> <p>Job Type:</p> <p><input type="checkbox"/> Residential</p> <p><input type="checkbox"/> Commercial</p> <p><input type="checkbox"/> Road, Highway, Bridge (city/state/federal)</p> <p>Finish:</p> <p><input type="checkbox"/> Straight bright wire (A1008 carbon steel)</p> <p>More-Rare Finishes Below: <i>(Lead-Time Negotiated)</i></p> <p><input type="checkbox"/> Mill Galvanized <input type="checkbox"/> Hot Dipped <input type="checkbox"/> Stainless Steel</p>

9802 Widmer Rd, Lenexa, KS 66215

www.QSWMFG.com



P: 913.888.2929 - FAX: 913.888.4405

100% American Labor & Materials